


The WERO8 range of Reverse Osmosis machines are very impressive pieces of equipment and have standard feature that most imported machines don't offer. WERO standard features include Stainless steel frames, Australian standard compliant electrical system, Danfos pressure switches, Grundfos or Lowara pump options, ROC controllers, and Schedule 80 pipework and fittings.

WERO8

- 900-4000L/hr
- 1-4 x 8040 membrane housings
- Pre-filter housing
- SS304 stainless frame, SS316 optional
- SS304 HP pump and globe valve
- FRP housing or 304 stainless housing, SS316 optional
- Schedule 80 uPVC pipe
- WERO ROC controller
- Pre and Post membrane conductivity meters
- 380V supply
- Main Isolation switch – interlock on door
- Barrel unions pre and post components
- Flow adjustable needle valves
- Float level control option standard
- Manual override switches in control panel
- Low pressure feed safety switch
- High pressure membrane safety switch
- RO flush and recovery adjustable
- Recirculation option standard

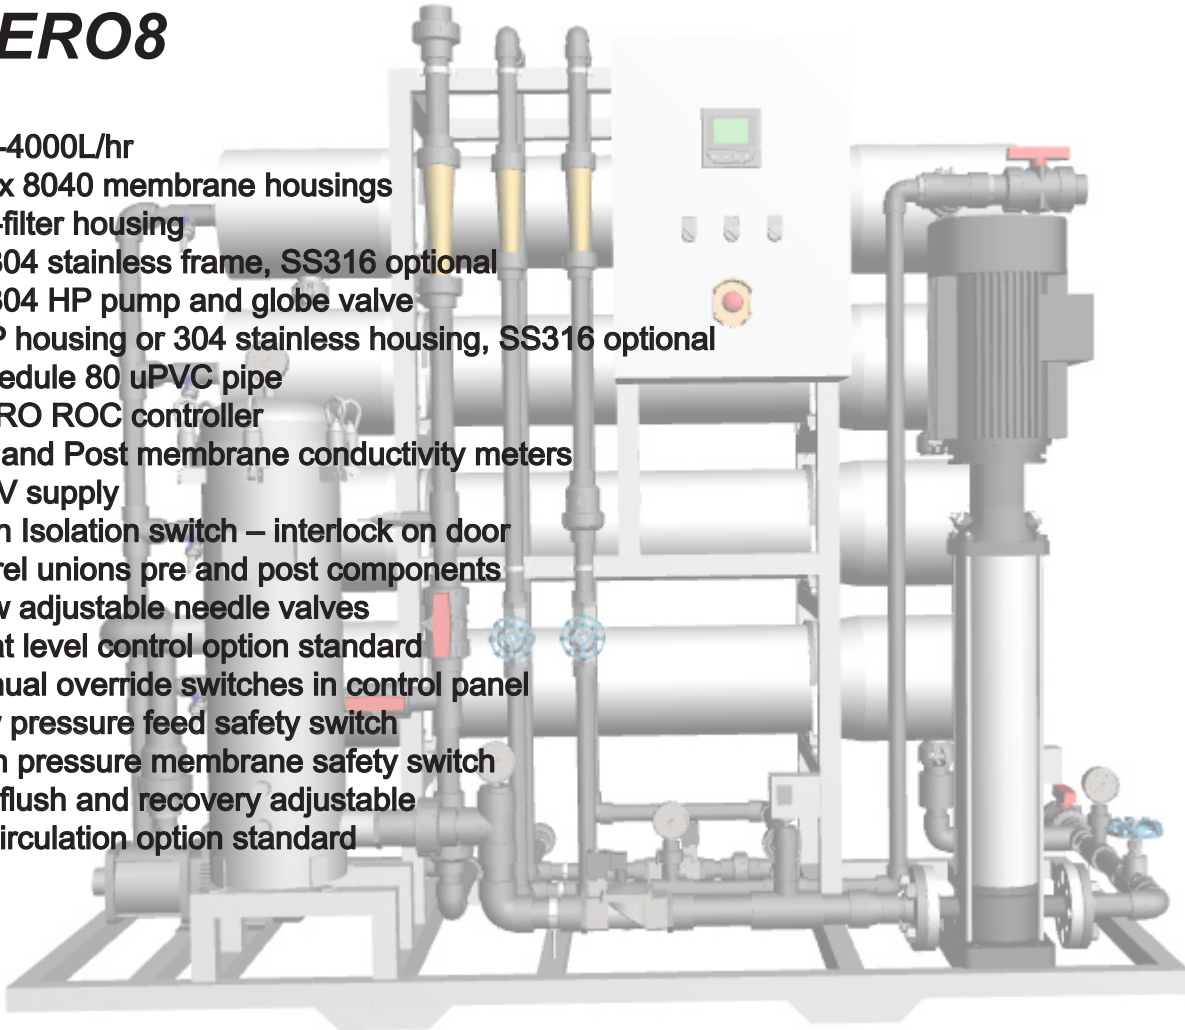

Specifications

WERO Size	WERO8-1	WERO8-2	WERO8-3	WERO8-4
Temperature	20deg	20deg	20deg	20deg
No Membranes	1	2	4	6
Permeate Flow	900L/h	2000L/h	3000L/h	4000L/h
Pump Size	.1.5kw	2.2kw	3kw	3.2kw
Water Quality	>2000TDS	>2000TDS	>2000TDS	>2000TDS
Salt Rejection	99%	99%	99%	99%

Flow data may vary depending on water quality